

# DS系列电脑无梭多针绗缝机



DS Series Computerized Non-Shuttle(Chain Stitch)Multi-needle Quilting Machine

## 用途 USE:

绗缝高级床垫, 床上用品, 地毯座垫等各种各样花型

used for quilting advanced mattresses, bedding products, carpets, cushions etc with various kinds of designs

示意图/working scheme

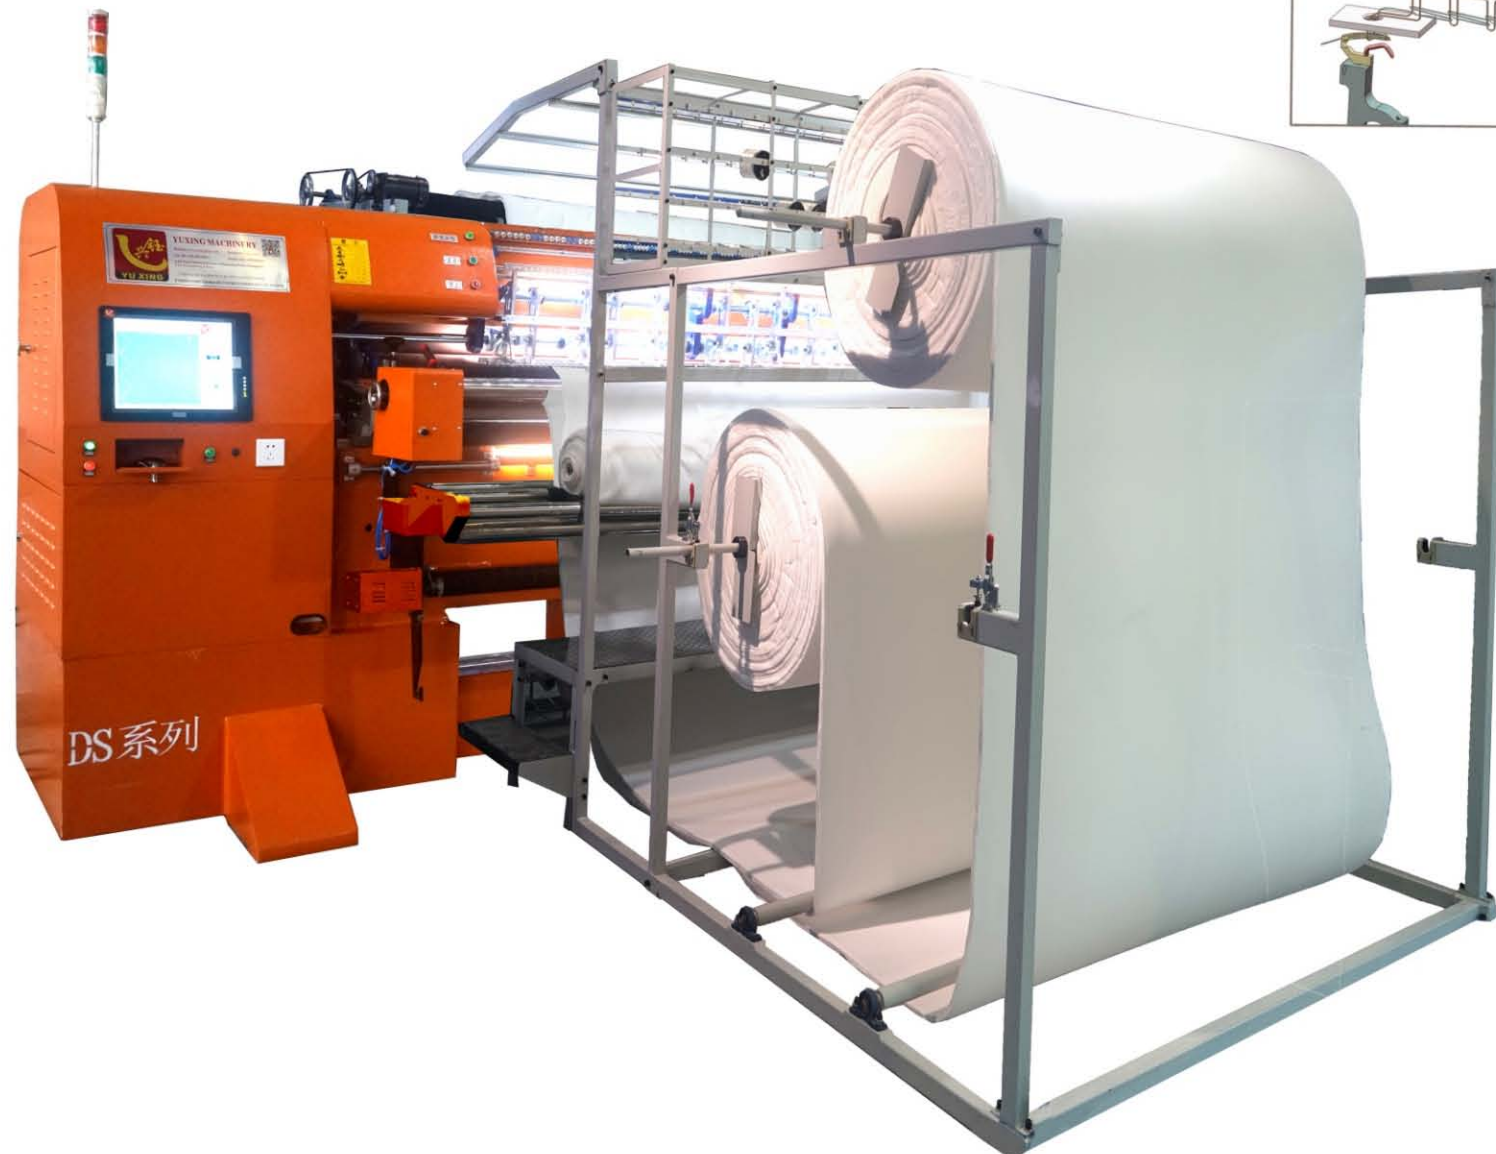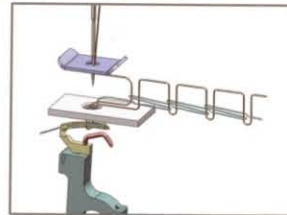

海绵架可选型

## 功能 FUNCTION :

- 采用先进的工艺制造流程
  - 针排压板采用双摇臂运动结构避免润滑油沾污面料
  - 高强度机身高安全保护装置高稳定性控制系统
  - Z轴主电机采用伺服控制, XY电机采用进口伺服驱动系统
  - 随时检测所有传感器及电脑工作状态
  - 面, 底线断线红外线检测自动停机, 自动提针及电脑调速
  - 自动提示系统故障, 快捷解除故障
  - 360度绗缝, 无限次跨步独立绗缝360°
  - 机器运行平稳, 速度高, 噪声小, 精度高, 加厚材料绗缝
  - 机器启动提醒装置
- Adopt the advanced process design
  - Needle bar and pressing block take the double rocker, avoid the materials be soiled by lube
  - High rigidity machine body, perfect protecting equipment and steady-going control system
  - Z-axis main motor adopts servo control, XY motor adopts imported servo drive system
  - Test the working state of all sensors and computer in real time
  - Auto-stop system when the upper or bottom thread broke by infrared. Auto lift needle and adjust the speed by computer
  - Automatic prompt system failure, quick troubleshooting
  - 360° quilting, and limitless multi-span and independent quilting
  - Steady running, high speed, low noise, very thick material with precise quilting
  - Ringing notice when start machine

## 主要技术参数/Main Technical Parameters

产品名称 Product Name	机型 Model	针排距离 Needle bar space	针距 Needle space	主机尺寸 (长X宽X高) Size:L*W*H	全机重量 Weight	绗缝宽度 Quilting width	X行程 X-axis movement	绗缝厚度 Quilting thickness	步长 Stitch	生产速度 Output	机针型号 Needle type	主轴转速 Rolling speed	电压 (AC) Rated voltage (AC)	功率 Power
DS系列电脑无梭多针绗缝机 DS Series Computerized non- shuttle chain stitch multi- needle quilting machine	YXN-94-3DS	2"+3"	1"	5000X1650X2000	8000kg	2400	304	≤80	2-8	10-300m/h	21#-24#	600-1500r/min	380V/50HZ, 220V/60HZ	8.5KW
	YXN-94-3DS	3"+3"	1"	5000X1650X2000	8000kg	2400	304	≤80	2-8	10-300m/h	21#-24#	600-1500r/min	380V/50HZ, 220V/60HZ	8.5KW



# D系列电脑无梭多针绗缝机

## D Series Computerized Non-Shuttle(Chain Stitch)Multi-needle Quilting Machine

### 用途 USE:

绗缝高级床垫，床上用品，地毯座垫等各种各样花型  
used for quilting advanced mattresses, bedding products, carpets, cushions etc with various kinds of designs

### 示意图/working scheme

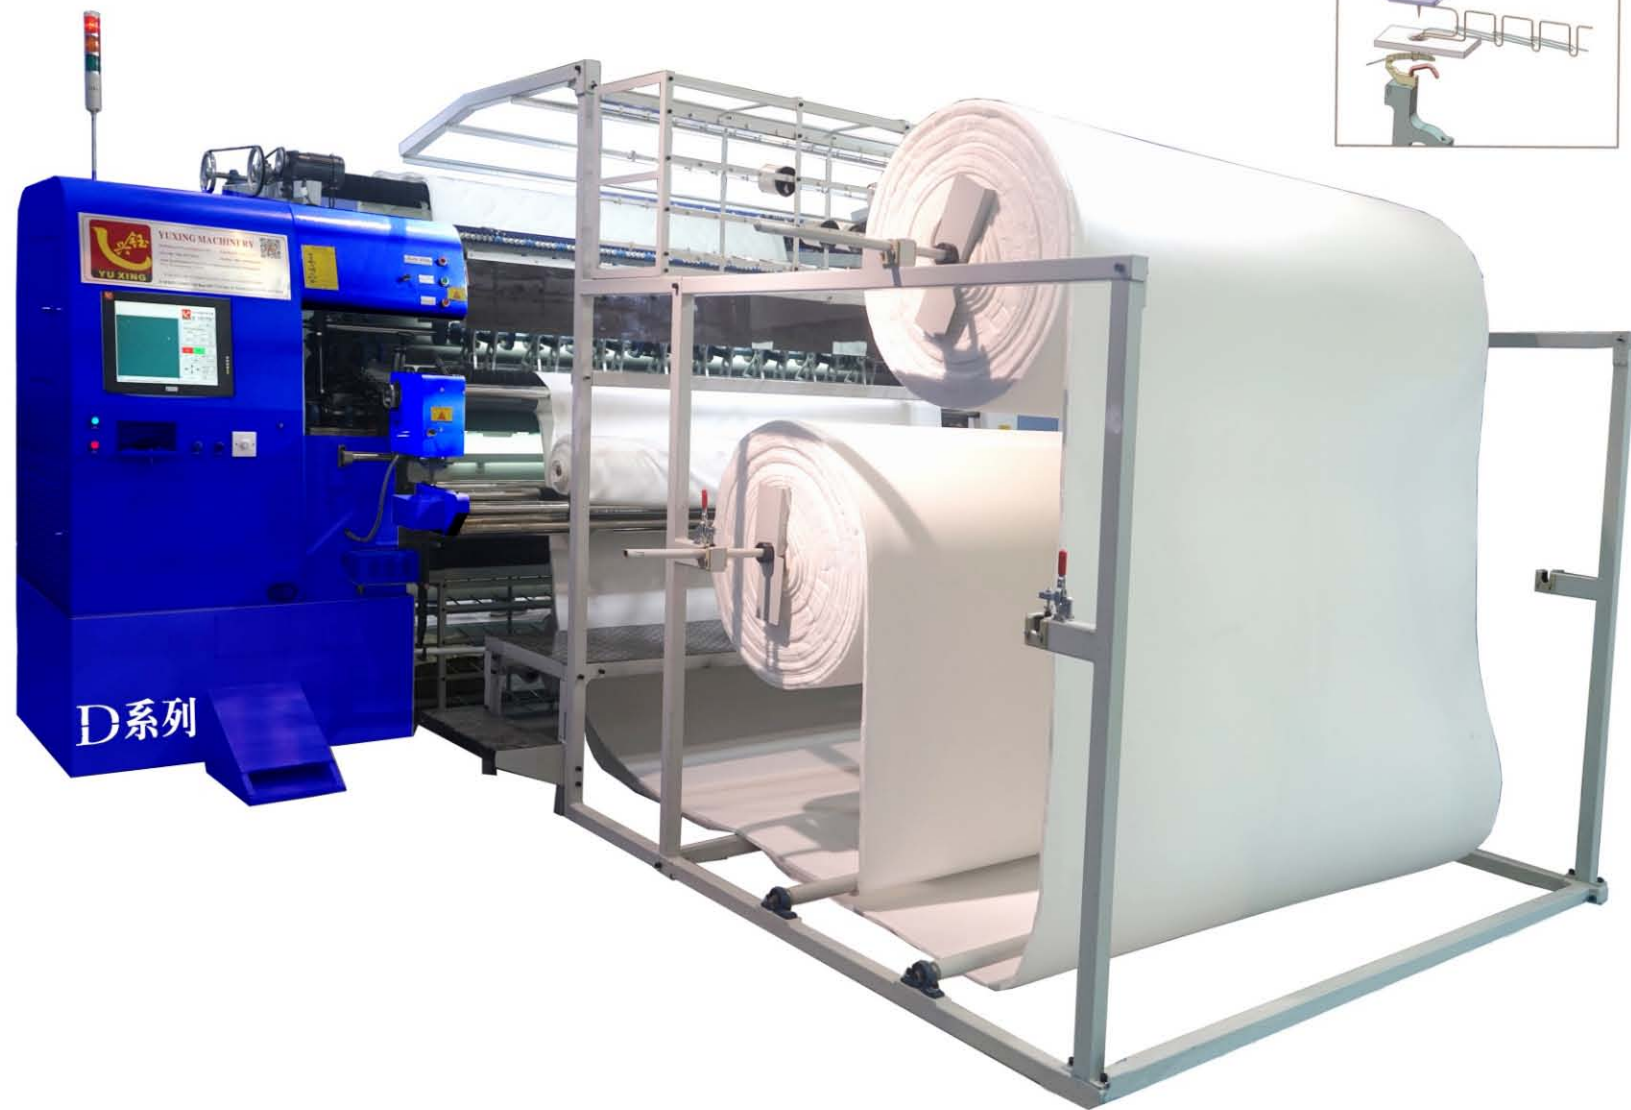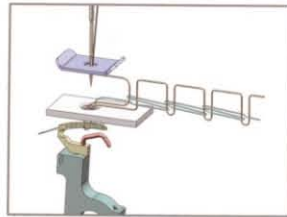

海绵架可选型

### 功能 FUNCTION :

- 采用先进的工艺制造流程
  - 针排压板采用双摇臂运动结构避免润滑油沾污面料
  - 高强度机身高安全保护装置高稳定性控制系统
  - Z轴主电机采用伺服控制，XY电机采用进口伺服驱动系统
  - 随时检测所有传感器及电脑工作状态
  - 面，底线断线红外线检测自动停机，自动提针及电脑调速
  - 自动提示系统故障，快捷解除故障
  - 360度绗缝，无限次跨步独立绗缝360°
  - 机器运行平稳，速度高，噪声小，精度高，加厚材料绗缝
  - 机器启动提醒装置
- Adopt the advanced process design
  - Needle bar and pressing block take the double rocker, avoid the materials be soiled by lube
  - High rigidity machine body, perfect protecting equipment and steady-going control system
  - Z-axis main motor adopts servo control, XY motor adopts imported servo drive system
  - Test the working state of all sensors and computer in real time
  - Auto-stop system when the upper or bottom thread broke by infrared. Auto lift needle and adjust the speed by computer
  - Automatic prompt system failure, quick troubleshooting
  - 360° quilting, and limitless multi-span and independent quilting
  - Steady running, high speed, low noise, very thick material with precise quilting
  - Ringing notice when start machine

### 主要技术参数/Main Technical Parameters

产品名称 Product Name	机型 Model	针排距离 Needle bar space	针距 Needle space	主机尺寸 (长X宽X高) Size:L*W*H	全机重量 Weight	绗缝宽度 Quilting width	X行程 X-axis movement	绗缝厚度 Quilting thickness	步长 Stitch	生产速度 Output	机针型号 Needle type	主轴转速 Rolling speed	电压 (AC) Rated voltage (AC)	功率 Power
D系列电脑无梭多针绗缝机 D Series Computerized non- shuttle chain stitch multi needle quilting machine	YXN-94-3D	2"+3"	1"	5000X1650X2000	7000kg	2400	304	≤80	2-8	10-250m/h	21#-24#	600-1200r/min	380V/50HZ, 220V/60HZ	7.5KW
	YXN-94-3D	3"+3"	1"	5000X1650X2000	7000kg	2400	304	≤80	2-8	10-250m/h	21#-24#	600-1200r/min	380V/50HZ, 220V/60HZ	7.5KW



# C系列电脑无梭多针绗缝机

## C Series Computerized Non-Shuttle (Chain Stitch) Multi-needle Quilting Machine

### 用途 USE:

绗缝高级床垫, 床上用品, 地毯座垫等各种各样花型  
used for quilting advanced mattresses, bedding products, carpets, cushions etc with various kinds of designs

示意图/working scheme

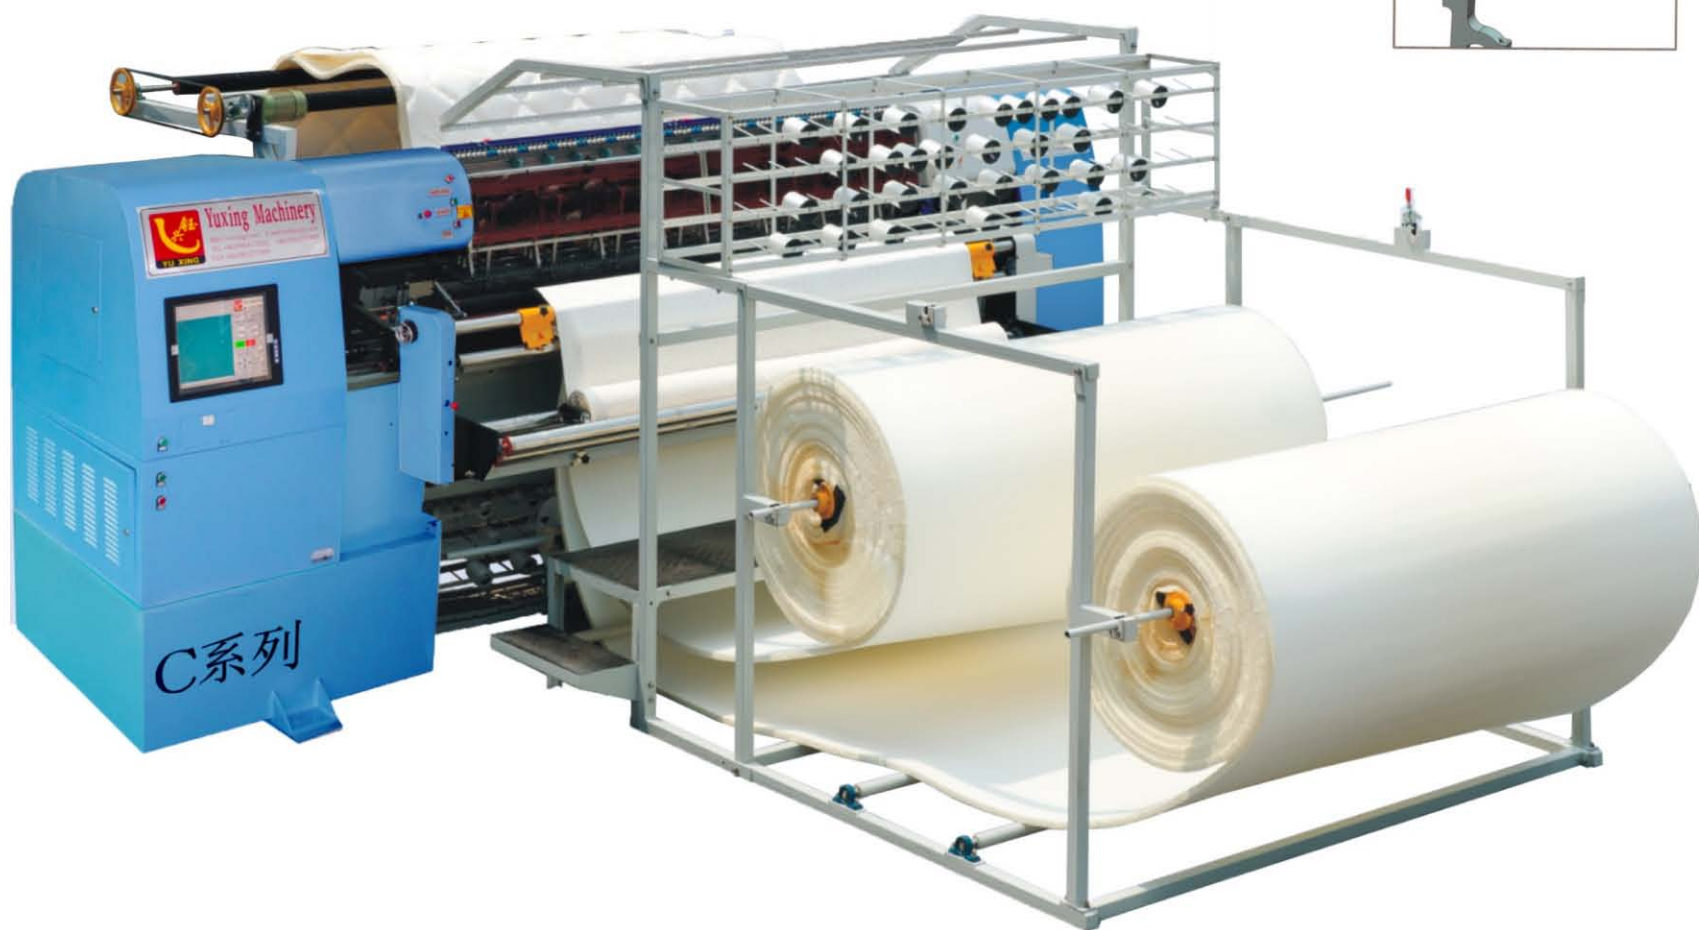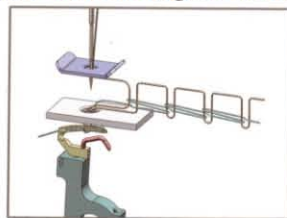

海绵架可选型

### 功能 FUNCTION:

- 采用先进的工艺制造流程
  - 针排压板采用双摇臂运动结构避免润滑油沾污面料
  - 高强度机身安全保护装置高稳定性控制系统
  - Z轴主电机采用变频控制, XY电机采用进口伺服驱动系统
  - 随时检测所有传感器及电脑工作状态
  - 面, 底线断线红外线检测自动停机, 自动提针及电脑调速
  - 自动提示系统故障, 快捷解除故障
  - 360度绗缝, 无限次跨步独立绗缝360°
  - 机器运行平稳, 速度高, 噪声小, 精度高, 加厚材料绗缝
  - 机器启动提醒装置
- Adopt the advanced process design
  - Needle bar and pressing block take the double rocker, avoid the materials be soiled by lube
  - High rigidity machine body, perfect protecting equipment and steady-going control system
  - Z-axis main motor adopts frequency conversion control, XY motor adopts imported servo drive system
  - Test the working state of all sensors and computer in real time
  - Auto-stop system when the upper or bottom thread broke by infrared. Auto lift needle and adjust the speed by computer
  - Automatic prompt system failure, quick troubleshooting
  - 360° quilting, and limitless multi-span and independent quilting
  - Steady running, high speed, low noise, very thick material with precise quilting
  - Ringing notice when start machine

### 主要技术参数/Main Technical Parameters

产品名称 Product Name	机型 Model	针排距离 Needle bar space	针距 Needle space	主机尺寸 (长X宽X高) Size:L*W*H	全机重量 Weight	绗缝宽度 Quilting width	X行程 X-axis movement	绗缝厚度 Quilting thickness	步长 Stitch	生产速度 Output	机针型号 Needle type	主轴转速 Rolling speed	电压 (AC) Rated voltage (AC)	功率 Power
C系列电脑无梭多针绗缝机 C Series Computerized non- shuttle chain stitch multi needle quilting machine	YXN-94-3C	2"+3"	1"	5000X1600X2000	6000kg	2400	304	≤80	2-8	10-200m/h	21#-24#	600-900r/min	380V/50HZ, 220V/60HZ	6.5KW
	YXN-94-3C	3"+3"	1"	5000X1600X2000	6000kg	2400	304	≤80	2-8	10-200m/h	21#-24#	600-900r/min	380V/50HZ, 220V/60HZ	6.5KW